


Our low-profile mini magnets have been extremely popular for interior traffic control. The surface mini magnet design (1-7/8" width) helps keep undersized openings within code. These ideal magnets for use on narrow-style aluminum doors!

FTS100 - Mini Magnet




Lock size: 1" D x 1-7/8" W x 9-27/32" L
(25.4mm x 47.6mm x 250mm)

Armature size: 15/32" D x 1-1/2" W x 7-1/8"
(11.9mm x 40 mm x 181 mm)

- Low-profile design
- Adjustable mounting bracket
- Easy wiring access cavity
- Holding force - 700lbs. (318 kg.)
- Voltage - 12/24 V-DC on site selectable
- Current draw - 12V/ 500 ma : 24V/ 250 ma
- Finish Natural anodized Aluminum
- Lock Weight - 2.25 lbs
- Armature Weight - 2 lbs
- Fail safe - Release instantly when power is discontinued
- Silent operation - No annoying humming and buzzing noise
- Reliability - No Mechanical moving part, Won't wear out
- Reversible - Not Handled
- Easy installation include necessary components and template
- Compatibility - can be used with any access control
- Application: Out-swinging Door
- Optional In-Swinging apply with Brackets FTS100 L Z
- Limited Warranty - 1 year

FTS100D - Double Mini Magnet

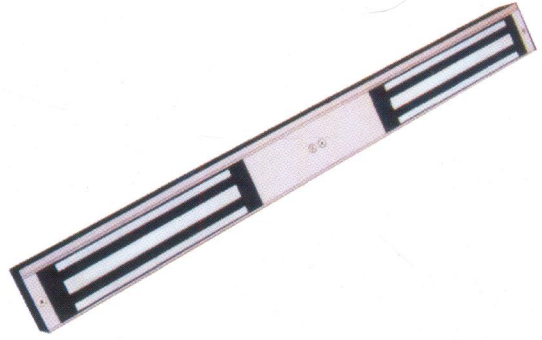

Lock size: 1" D x 1-7/8" W x 19-11/16" L
(25.4mm x 47.6mm x 500mm)

Armature size: 15/32" D x 1-1/2" W x 7-1/8"
(11.9mm x 40 mm x 181 mm)

- Low-profile design
- Adjustable mounting bracket
- Easy wiring access cavity
- Holding force - 700lbs. (318 kg.) on each magnet
- Voltage - 12/24 V-DC on site selectable
- Current draw - 12V/500 ma: 24V/ 250 ma on each magnet
- Finish - Natural anodized Aluminum
- Lock Weight - 2.25 lbs
- Armature Weight - 2 lbs
- Fail safe - Release instantly when power is discontinued
- Silent Operation - No annoying humming and buzzing noise
- Reliability - No Mechanical moving part, Won't wear out
- Reversible - Not Handled
- Easy Installation Include necessary components and template
- Compatibility - can be used with any access control
- Application : Out-swinging Door
- Optional In-Swinging apply with Brackets FTS100 L Z
- Limited Warranty - 1 year

FTS101-Mini Magnet

Mini Magnet with above function plus inbuilt Bond Sensor (Door status sensor), Dual colour LED and Relay dry contact output - COM, NO & NC, Rating - 500ma at 24V-DC/AC

FTS101D - Double Mini Magnet

Mini Magnet with above function plus inbuilt Bond Sensor (Door status sensor), Dual colour LED and Relay dry contact output - COM, NO & NC, Rating - 500 ma at 24V - DC/AC